

BURDA OVERVIEW 2018/2019


HEATING / COOLING / LIGHTING / MODULAR / CONTROL



RELAX!



RELAX GLASS IRA

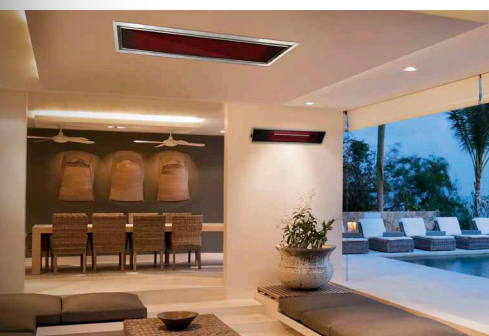

RELAX DARK IRC



MODULAR



Onlineshop: www.shop.burdawtg.com

BURDA WORLDWIDE TECHNOLOGIES GMBH

Rudolf-Diesel-Straße 18 · D-65760 Eschborn · Tel +49 6173 / 324 24 0 · Fax +49 6173 / 324 24 24 · E-Mail info@burdawtg.de · www.burdawtg.com

RELAX GLASS

OUTDOOR & INDOOR

58,5 x 17 x 8 cm



Inklusive Halterung

90 x 17 x 8 cm



RELAX GLASS IRA IP65

60 x 21,4 x 12,3 cm



FERNBEDIENUNG/DIMMER OPTIONAL

97,8 x 23,1 x 12,3 cm



RELAX GLASS FRAME IRA IP65

RELAX DARK

INDOOR



158 x 20,1 x 5,8 cm




Inklusive Halterung

RELAX DARK IRC IP55*

MODULAR

OUTDOOR

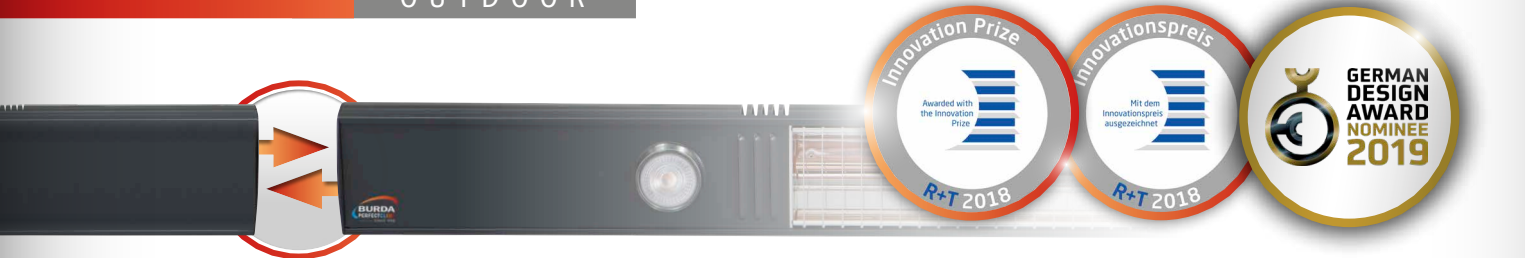

100 cm - 2 x 3,5 W LED



M 1

100 cm - 1 x 2 kW Heizstrahler/Heater




M 2

100 cm - 2 x 3,5 W LED + 1 x 2 kW Heizstrahler/Heater



M 3

50 cm/75 cm/100 cm



M BLEND



BLUETOOTH APP & REMOTE

OUTDOOR



TERM2000 BLUETOOTH IP67



SMART BLUETOOTH IP24
SMART MULTI BLUETOOTH IP24



SMART TOWER
BLUETOOTH IP24



BURDA APP CONTROL AND REMOTE
IOS/ANDROID

TERM2000


OUTDOOR



TERM2000 IP67



TERM2000 IP44

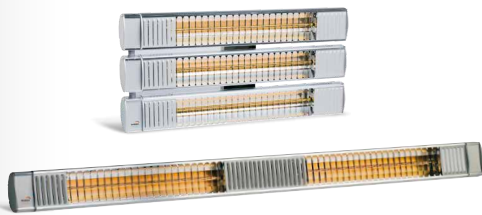

TERM2000 MULTI IP67



TERM TOWER PALMS IP67



TERM2000 NO GLARE IP20*

TERM2000 LIGHT & HEAT

OUTDOOR



TERM2000 L&H FIX IP65

TERM2000 L&H IP65




TERM2000 L&H XL IP65

SMART

OUTDOOR



SMART IP24



SMART FRAME IP24




SMART TOWER IP24



SMART MULTI IP24

PERFECTCLIME® HEATING & COOLING

OUTDOOR



PERFECTCLIME® TERM2000 IP67



PERFECTCLIME® TERM2000 L&H IP65



PERFECTCLIME® SMART IP24



PERFECTCLIME® COOLING BASIC SET

CONTROL

DIMMER



BLUETOOTH DIMMER IP65



BHC 4002/BHC 6003



BHC 4001/BHC 6001

MOTION DETECTORS/TIMER



TIMER TS2/TS4/TS6



BPIR



BPIR4



BPIR6

FUNK/RADIO DIMMER



BRFE20



SOLO BI-DIRECTIONAL



MONO/VARIO BI-DIRECTIONAL


HEATPANELS



MIRROR HEAT



CLASSIC HEAT

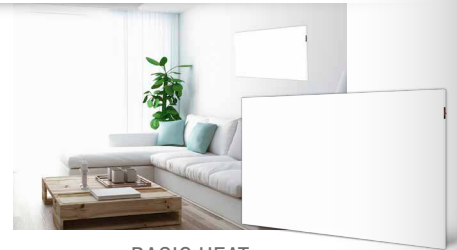

BASIC HEAT



GLASS HEAT



IMAGE GLASS HEAT

THERMOSTAT



THERMOSTAT
BHC1868*



THERMOSTAT
BHCINSTAT+3R*



THERMOSTAT
BHCFIT3R*



THERMOSTAT
BHCRT-E 3311



EMPFÄNGER/
RECEIVER
BHC1868a1S



EMPFÄNGER/
RECEIVER
BHC1868UP



EMPFÄNGER/
RECEIVER
BHC1868a1a



FENSTERKONTAKT/
WINDOW CONTACT
BHC1868R1F

*INDOOR: Für die Nutzung der Heizstrahler in **Innenbereichen** muss zur Erfüllung der EU-Verordnung 2015/1188 zwingend die externe Steuerung BHC1868 (Funk) oder BHCINSTAT+3R (verkabelt) oder BHCFIT3R (verkabelt) oder Gleichwertige verwendet werden. Ansonsten verliert das Gerät die CE-Kennzeichnung.

*INDOOR: For **indoor use** of all models, the external control BPIRF (wireless), BHCINSTAT+3R (wired) or BHCFIT3R (wired) or equivalent must be used to comply with EU Regulation 2015/1188. Otherwise the device loses the CE mark.

